


# RF Balun Transformer


## EBA9573-G018081

2021-05-06 Rev. 0




75Ω 1: 1.77 CT Flux Coupled Transformer 5-100 MHz


### Outline Drawing(mm)

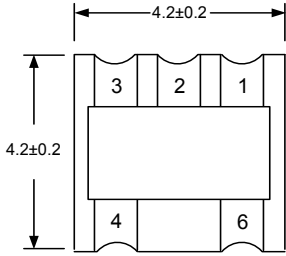


Top View

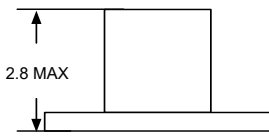

### Electrical structure



### Recommended layout(mm)



### Pin Connections

Input	4
Output 1	3
Output 2	1
Ground	2,6

### Features





- Operating temperature range: -40°C to +85°C
- Storage temperature range: -55°C to +100°C
- 260°C Reflow Compatible
- RoHS compliant and lead free
- Input Power: 250mW
- DC Current: 30mA

### Applications


- Impedance matching
- Balanced amplifier
- Balun
- Cellular and VHF

### Electrical Specifications: TA=25°C, 0dBm, Z0=75Ω

Parameter	Test Conditions	Units	Min	Typ	Max
Main line Loss (Pin4-3)	5-100MHz	dB	—	0.5	0.8
Main line Loss (Pin4-1)	5-100MHz	dB	—	0.5	0.8
Amplitude Balance	5-100MHz	dB	0.0	0.1	0.5
Phase Balance	5-100MHz	°	0.0	1.0	5.0
Input Return Loss(Pin4)	5-100MHz	dB	20.0	30.0	—

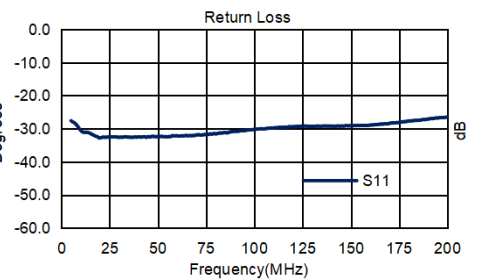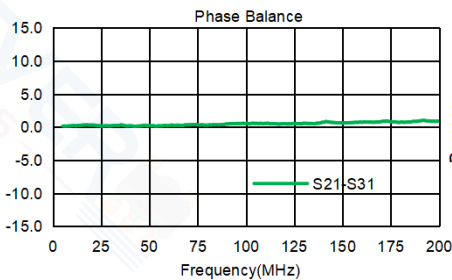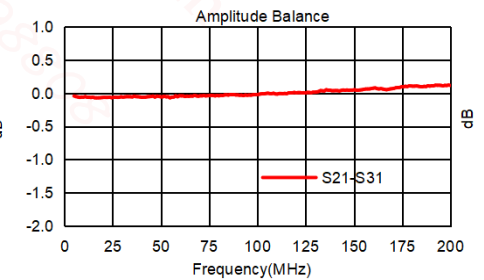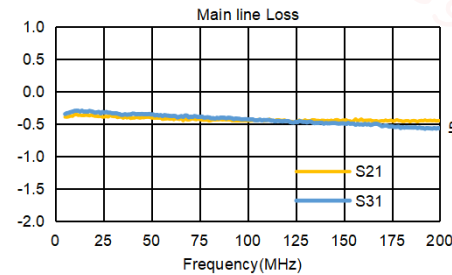

### Carrier Tape Orientation

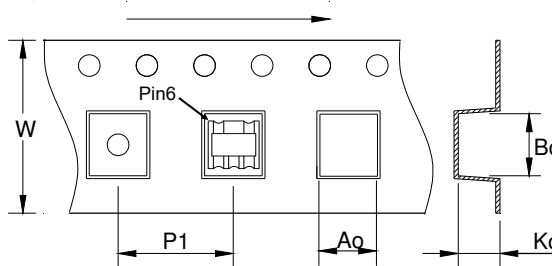

### Tape & Reel Information

Parameter	Units	Value
Qty per reel	PCS	2000
Reel Size	mm	330
Tape Width	mm	16.00
Pitch	mm	8.00
Ao	mm	4.80
Bo	mm	4.80
Ko	mm	3.50