


Directional Coupler



ECJ0701-B032122

2019-11-10 Rev. 0




75Ω 7dB Coupler 40-2050 MHz


Outline Drawing(mm)



Electrical structure



Recommended layout(mm)

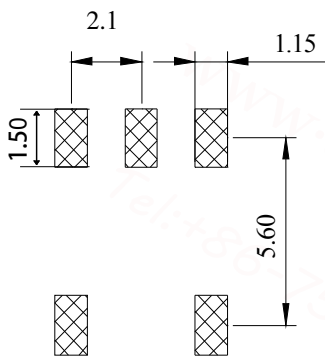

Pin Connections

Input	5
Output	1
Coupled	4
Ground	2
75Ω Term External	3

Features





- DC current: 50mA Max
- Power Input(as a splitter): 1.0W Max
- 260°C Reflow Compatible
- RoHS Compliant and Pb Free
- Operating temperature range: -40 °C to +85 °C
- Storage temperature range: -55 °C to +100 °C

Applications


- For Docsis 3.0 & 3.1 Cable Modem.
- For Wideband Push-pull Amplifiers.
- For CATV Amplifiers Module & Set top box.
- For CATV Optical Receivers and Amplifiers.

Electrical Specifications:TA=25 °C, 0dBm, Z0=75Ω

Parameter	Test Conditions	Units	Min	Typ	Max
Main line Loss (Pin5-1)	40-2050MHz	dB	—	2.0	5.0
Coupling (Pin5-4)	40-2050MHz	dB	5.0	7.3	8.0
Return Loss(Pin5)	40-2050MHz	dB	10.0	25.0	—
Return Loss(Pin1)	40-2050MHz	dB	10.0	18.0	—
Return Loss(Pin4)	40-2050MHz	dB	12.0	25.0	—
Isolation(Pin4-1)	40-2050MHz	dB	15.0	22.0	—

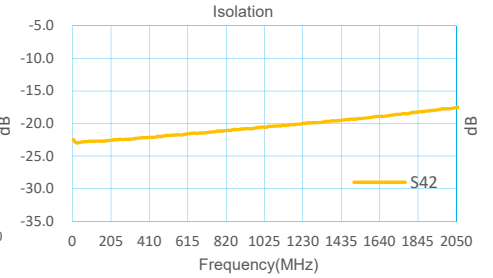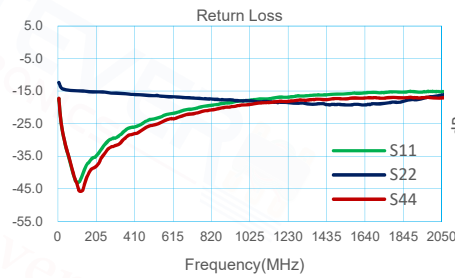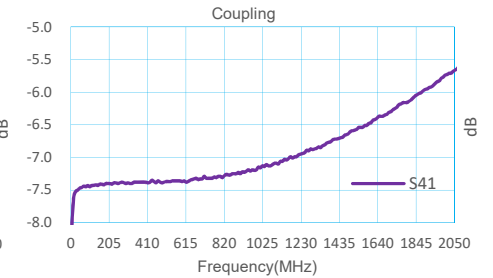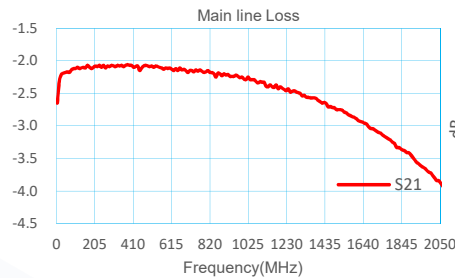

Carrier Tape Orientation

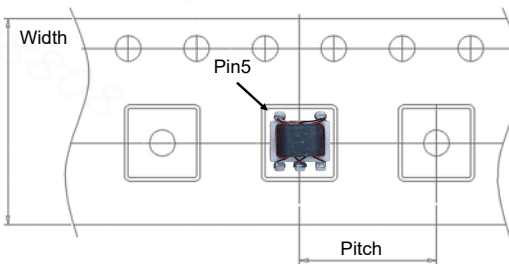

Tape & Reel Information

Parameter	Units	Value
Qty per reel	PCS	1500
Reel Size	mm	330
Tape Width	mm	12.00
Pitch	mm	12.00
Ao	mm	6.40
Bo	mm	6.00
Ko	mm	3.20