


● Outline Drawing(mm)



● Electrical Specifications

Frequency (MHz)	Port insertion loss (dB)		Amplitude balance (dB)	Isolation (dB)	Phase balance (deg.)	Input standing wave	Port 1 standing wave	Port 2 standing wave
	Input-port 1	Input-port 2						
200.00	3.59	3.60	0.01	17.18	0.16	1.96	1.56	1.56
300.00	3.59	3.62	0.03	18.14	0.19	1.96	1.59	1.60
450.00	3.61	3.65	0.04	19.32	0.24	1.95	1.63	1.64
550.00	3.62	3.67	0.05	20.10	0.25	1.95	1.66	1.67
650.00	3.62	3.69	0.07	20.96	0.31	1.94	1.68	1.69
850.00	3.62	3.72	0.10	23.08	0.32	1.92	1.74	1.75
950.00	3.63	3.74	0.11	24.37	0.35	1.92	1.76	1.77
1050.00	3.63	3.76	0.13	25.89	0.38	1.91	1.79	1.80
1150.00	3.63	3.78	0.15	27.69	0.44	1.89	1.82	1.83
1250.00	3.63	3.79	0.16	30.01	0.48	1.88	1.84	1.86
1400.00	3.64	3.82	0.18	35.48	0.56	1.85	1.88	1.90
1800.00	3.64	3.91	0.27	31.95	0.78	1.79	1.98	2.03
2000.00	3.66	3.97	0.31	26.83	0.86	1.75	2.03	2.09
2200.00	3.67	4.04	0.37	23.56	1.14	1.73	2.08	2.16
2500.00	3.70	4.13	0.43	20.27	1.32	1.71	2.15	2.27

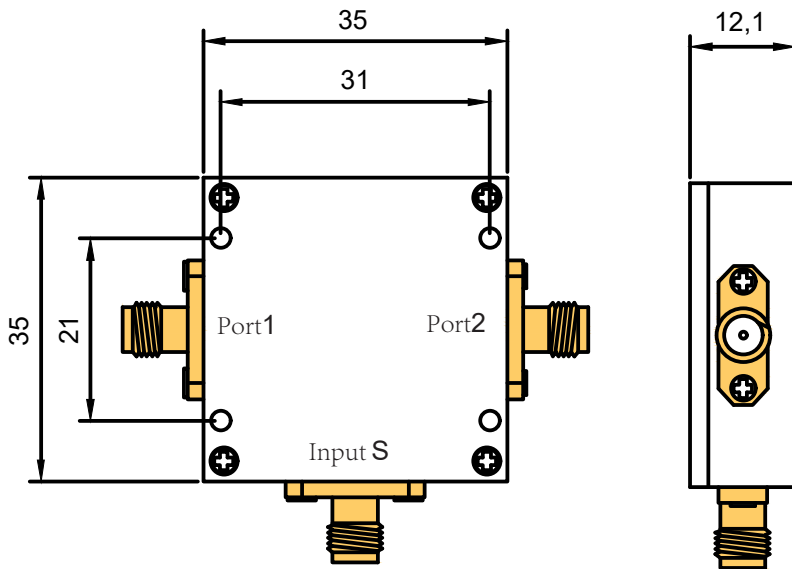